

STANDARD STEEL RESIDENTIAL GARAGE DOORS



PRICING AND INFORMATION


Contents:

Panel Specifications	2-3
Windows	4-5
Product Information	6-11
Models 4200-4203	
Models 5500-5503	
Models 6130-6133	
Models 6200-6203	
Models 7130-7133	
Models 7200-7203	
Warranty Information	12-13


STANDARD STEEL RESIDENTIAL GARAGE DOORS PANEL SPECIFICATIONS

SECTION CONFIGURATIONS

Standard Heights

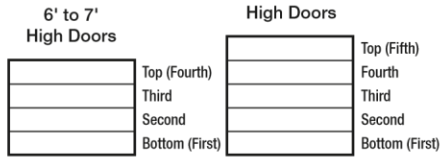


Extended Heights

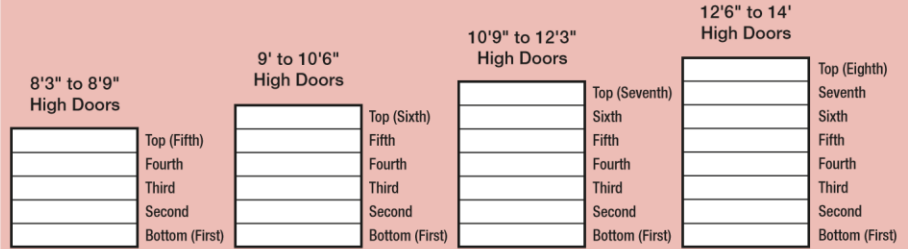


HEIGHT EXAMPLES

Steel door heights are determined by using a combination of 18" and/or 21" section heights. The illustrations below show the required section height combinations for a specific door height.

STANDARD DOOR HEIGHTS (6' TO 8' HIGH DOORS)

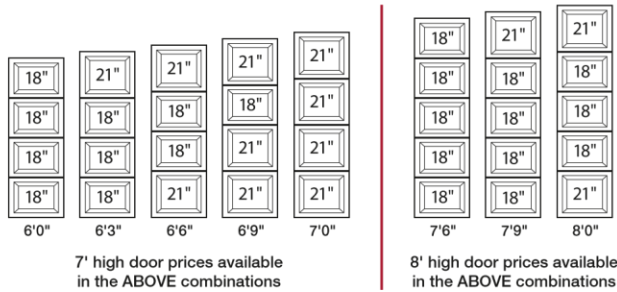

EXTENDED DOOR HEIGHTS (8'3" TO 14' HIGH DOORS)

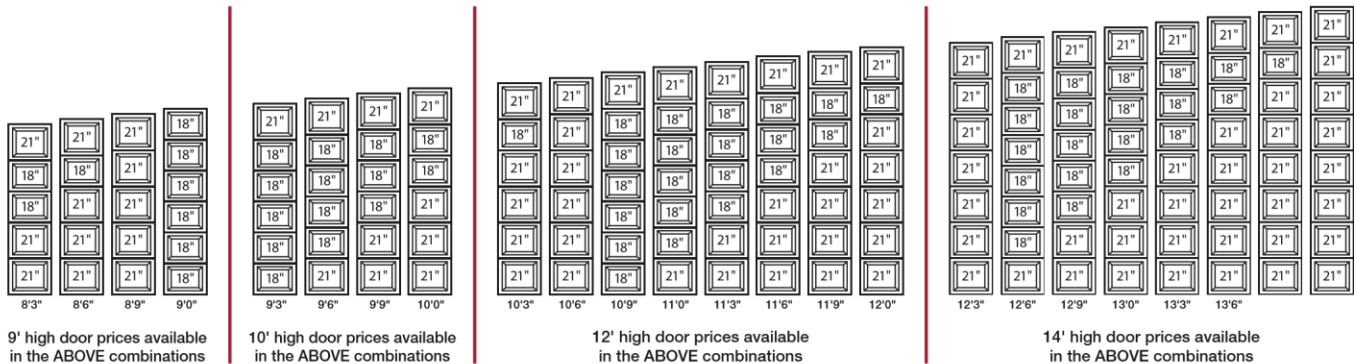

STANDARD STEEL


RESIDENTIAL GARAGE DOORS

PANEL SPECIFICATIONS

The illustrations below show the number of panels across four specific door widths. For example, a 10' wide, classic raised panel door has five panels across. All examples shown are for a 7' high door. Other door heights may have additional sections.

ELEGANT/TRADITIONAL RAISED OR FLUSH PANEL STYLES (FLUSH DESIGNS NOT SHOWN)


No. of Panels or Windows Across

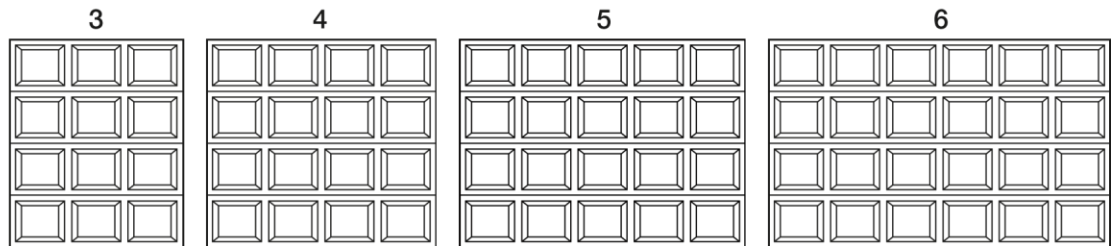

Door Widths

6'2" - 7'10" 8' - 9'10" 10' - 11'10" 12' - 13'10"


No. of Panels or Windows Across

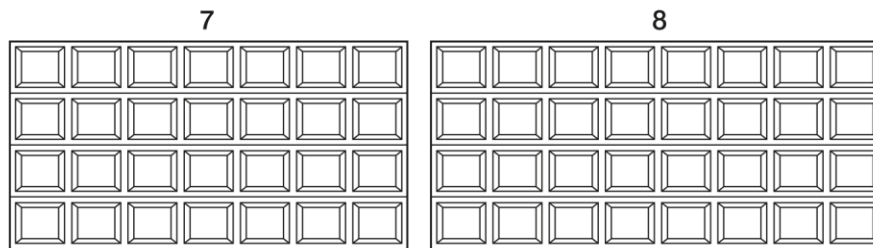

Door Widths

14' - 15'10" 16' - 18'10"

No. of Panels or Windows Across

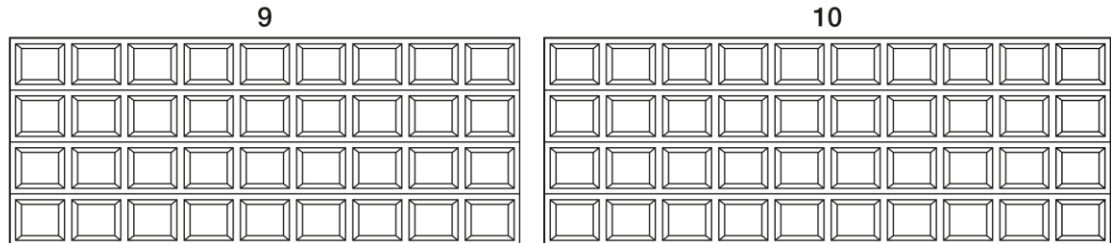


Door Widths

19' - 19'10" 20'

LONG PANEL STYLE


No. of Panels or Windows Across

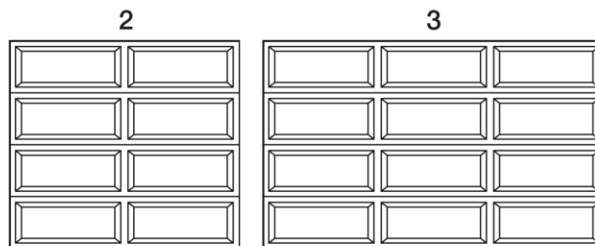

Door Widths

8', 9', 10' 12', 14'

No. of Panels or Windows Across

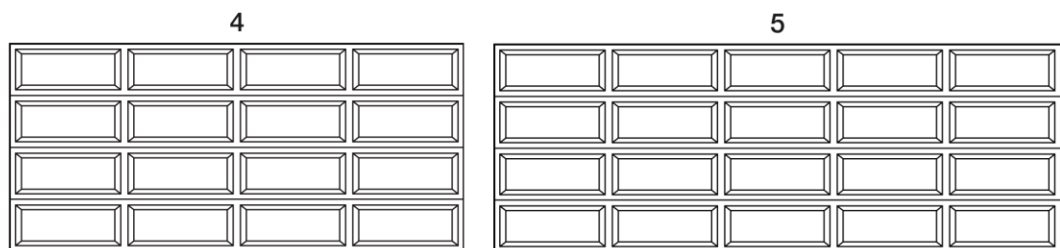

Door Widths

15', 15'6", 16', 17', 18' 19', 19'6", 20'

Effective October 2016

STANDARD STEEL RESIDENTIAL GARAGE DOORS

WINDOWS

Add a personal touch with designer window lites.
Available on GOLD, SILVER & BRONZE Series.

PLAIN

Single pane, double strength glass.



Shor



Lon

DESIGNER INSERTS

Dress up our plain windows with our UV-protected, color-matched Designer Inserts. They simply snap in over our plain window.



Charleston 508



Charleston 608



Colonial 509



Stockton 612



Sunset 502 (7, 7'6", 12' widths only)



Prairie 510



Prairie 610



Sunset 501 (8, 9', 12', 16', 17', 18', 20' widths only)



Madison 611



Sunset 503 (8, 9', 16', 17', 18' widths only)



Madison Arch 613



Sunset 504 (14', 15', 15'6" widths only)



Sunset 601



Sunset 505 (16', 17', 18' widths only)



Sunset 603



Sunset 506 (10', 20' widths only)



Sunset 605 (15', 16', 17', 18' widths, Long Panel doors only)

Effective October 2016

DESIGNER CLASSICS

For a touch of elegance, choose our Designer Classics options.




Trenton® Short



Trenton® Long




Carlisle® Short




Carlisle® Long

*Available non-insulated only.



Kristin® Short



Kristin® Long




Tuscany Short*



Tuscany Long*



Roselle® Short



Roselle® Long



Orleans Short*



Orleans Long*

ARCHITECTURAL SERIES

For a larger viewing area, choose our Architectural Series options. Only available on GOLD Series doors.



Plain Short



Plain Long



ARCH1 Plain



ARCH2 Plain



Trenton® Short



Kristin® Short



Clayton™ Short

*Available non-insulated only.



Short with Rectangular Grilles



Long with Rectangular Grilles



ARCH1 with Vertical Grilles




ARCH2 with Vertical Grilles



Trenton® Long



Kristin® Long



Clayton™ Long



Short with Square Grilles



Long with Square Grilles



ARCH1 with Grilles



ARCH2 with Grilles



Wrought Iron Short*



Wrought Iron Long*




Wrought Iron ARCH*



Model 4203 Traditional Long Panel with Sunset 603 Windows

ONE-LAYER CONSTRUCTION

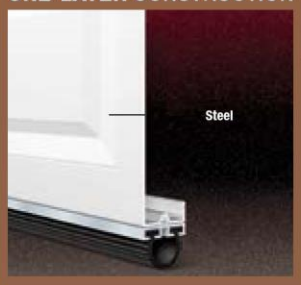

DESCRIPTION

One-layer 25 gauge steel construction is durable and economical.

SPECIFICATIONS

- 2" thick sections.
- 25 gauge hot-dipped galvanized steel.
- Door can be painted with high-quality latex-based paint to match house trim.
- Galvanized end stiles.
- Nylon rollers for smooth and quiet operation.
- Patented Safe-T-Bracket® bottom bracket (not available on doors over 8' high).

PRICE INCLUDES

- Inside slide lock.
- All hardware, 12" radius track and springs.
- Extension springs with a safety containment cable are standard on all single car doors (up to 10' wide and up to 8' high).
- EZ-SET® torsion springs are standard on all double car doors (over 10' wide and up to 8' high).
- Torsion springs are standard on all extended height doors (over 8' high). Other springs are not available for extended height doors.
- Bottom weatherseal in aluminum retainer.
- Operator reinforcement bracket.

Does not include rear track hanger, low headroom kit, vinyl perimeter seals (stop molding).

PANEL OPTIONS



Traditional Raised Panel Model 4200 Traditional Long Panel Model 4203

PANEL COLORS



Standard White Almond Desert Tan Sandtone Chocolate

WINDOWS AVAILABLE

(SEE COMPLETE LIST ON PAGES RS20-RS21)


Note: Please specify section to receive window: top section or intermediate section number.



Plain
(Shown on Traditional Raised Panel Door)



Designer Inserts
(Sunset 503 Insert Shown on Traditional Raised Panel Door)



Designer Classics – Glass
(Trenton Shown on Traditional Raised Panel Door)

WARRANTIES (SEE COMPLETE DETAILS ON PAGE RS24)



ADDITIONAL ITEMS (SEE PAGES RS22-RS23)

- Low headroom and springing options.
- Vinyl perimeter seals (stop molding).
- Rear track hanging kit.



Model 5500 Traditional Raised Panel with Sunset 503 Windows

TWO-LAYER CONSTRUCTION



DESCRIPTION

Two-layer construction provides quiet operation and enhanced durability. 1 $\frac{1}{8}$ " vinyl backed polystyrene insulation is bonded to 25 gauge steel for added energy efficiency.

SPECIFICATIONS

- 2" thick sections.
- 1 $\frac{1}{8}$ " thick expanded polystyrene insulation with vinyl backer.
- 25 gauge hot-dipped galvanized steel.
- Door can be painted with high-quality latex-based paint to match house trim.
- Galvanized end styles.
- Nylon rollers for smooth and quiet operation.
- Optional designer window inserts are UV protected to eliminate discoloration and can be installed on the inside or outside of window frame.
- Patented Safe-T-Bracket® bottom bracket (not available on doors over 8' high).
- Insulating R-value: 6.3.*

*Calculated door section R-value is in accordance with DASMA TDS-163.

PRICE INCLUDES

- Inside slide lock.
- All hardware, 12" radius track and springs.
- Extension springs with a safety containment cable are standard on all single car doors (up to 10' wide and up to 8' high).
- EZ-SET® torsion springs are standard on all double car doors (over 10' wide and up to 8' high).
- Torsion springs are standard on all extended height doors (over 8' high). Other springs are not available for extended height doors.
- Bottom weatherseal in aluminum retainer.
- Operator reinforcement bracket.

Does not include rear track hanger, low headroom kit, vinyl perimeter seals (stop molding).

PANEL OPTIONS



Traditional Raised Panel Model 5500 Traditional Long Panel Model 5503

PANEL COLORS



WINDOWS AVAILABLE

(SEE COMPLETE LIST ON PAGES RS20-RS21)


Note: Please specify section to receive window: top section or intermediate section number.



Plain
(Shown on Traditional Raised Panel Door)



Designer Inserts
(Sunset 503 Insert Shown on Traditional Raised Panel Door)



Designer Classics – Glass
(Trenton Shown on Traditional Raised Panel Door)

WARRANTIES (SEE COMPLETE DETAILS ON PAGE RS24)



ADDITIONAL ITEMS (SEE PAGES RS22-RS23)

- Low headroom and springing options.
- Vinyl perimeter seals (stop molding).
- Rear track hanging kit.



Model 6130 Elegant Raised Panel with Colonial 509 Windows

THREE-LAYER CONSTRUCTION



DESCRIPTION

Three-layer construction provides the quietest operation and superior durability. 1 1/8" thick polystyrene insulation is bonded to 27 gauge steel for maximum strength and energy efficiency.

SPECIFICATIONS

- 1 1/8" thick sections.
- Finish painted hot-dipped galvanized steel skins with unsurpassed rust protection.
- Door can be painted with high-quality latex-based paint to match house trim.
- Interior prefinished in white only.
- Prepainted end stiles.
- Nylon rollers for smooth and quiet operation.
- Optional designer window inserts are UV protected to eliminate discoloration and can be installed on the inside or outside of window frame.
- Window frame design for easy glass replacement.
- Patented Safe-T-Bracket® bottom bracket (not available on doors over 8' high).
- Insulating R-value: 6.5.*
- Doors available in widths up to 18' and heights up to 14'.

*Calculated door section R-value is in accordance with DASMA TDS-163.

PRICE INCLUDES

- Inside slide lock.
- All hardware, 12" radius track and springs.
- Extension springs with a safety containment cable are standard on all single car doors (up to 10' wide and up to 8' high).
- EZ-SET® torsion springs are standard on all double car doors (over 10' wide and up to 8' high).
- Torsion springs are standard on all extended height doors (over 8' high). Other springs are not available for extended height doors.
- Bottom weatherseal in aluminum retainer.
- Operator reinforcement bracket.

Does not include rear track hanger, low headroom kit, vinyl perimeter seals (stop molding).

PANEL OPTIONS



Elegant Raised Panel Model 6130

Elegant Long Panel Model 6133

PANEL COLORS



WINDOWS AVAILABLE

(SEE COMPLETE LIST ON PAGES RS20-RS21)


Note: Please specify section to receive window: top section or intermediate section number.



Plain (Shown on Elegant Raised Panel Door)



Designer Inserts (Sunset 503 Insert Shown on Elegant Raised Panel Door)



Designer Classics – Glass (Trenton Shown on Elegant Raised Panel Door)



Architectural Series (Short with Rectangular Grilles on Elegant Raised Panel Door)

WARRANTIES (SEE COMPLETE DETAILS ON PAGE RS24)



GOLD STANDARD STEEL

RESIDENTIAL GARAGE DOORS

POLYSTYRENE MODELS 6200-6203



Model 6200 Elegant Raised Panel with Charleston 508 Windows

THREE-LAYER CONSTRUCTION



DESCRIPTION

Three-layer construction provides the quietest operation and superior durability. 2" thick polystyrene insulation is bonded to 27 gauge steel for maximum strength and energy efficiency.

SPECIFICATIONS

- 2" thick sections.
- Finish painted hot-dipped galvanized steel skins with unsurpassed rust protection.
- Door can be painted with high-quality latex-based paint to match house trim.
- Interior prefinished in white only.
- Prepainted end stiles.
- Nylon rollers for smooth and quiet operation.
- Optional designer window inserts are UV protected to eliminate discoloration and can be installed on the inside or outside of window frame.
- Window frame design for easy glass replacement.
- Patented Safe-T-Bracket® bottom bracket (not available on doors over 8' high).
- Insulating R-value: 9.0.*
- Doors available in widths up to 20' and heights up to 14'.

*Calculated door section R-value is in accordance with DASMA TDS-163.

PRICE INCLUDES

- Inside slide lock.
- All hardware, 12" radius track and springs.
- Extension springs with a safety containment cable are standard on all single car doors (up to 10' wide and up to 8' high).
- EZ-SET® torsion springs are standard on all double car doors (over 10' wide)
- Torsion springs are standard on all extended height doors (over 8' high). Other springs are not available for extended height doors.
- Bottom weatherseal in aluminum retainer.
- Operator reinforcement bracket.

Does not include rear track hanger, low headroom kit, vinyl perimeter seals (stop molding).

PANEL OPTIONS



Elegant Raised Panel Model 6200

Elegant Long Panel Model 6203

PANEL COLORS



*See page RS23 for price adder

WINDOWS AVAILABLE

(SEE COMPLETE LIST ON PAGES RS20-RS21)

Note: Please specify section to receive window: top section or intermediate section number.




Plain

(Shown on Elegant Raised Panel Door)




Designer Inserts

(Sunset 503 Insert Shown on Elegant Raised Panel Door)



Designer Classics – Glass

(Trenton Shown on Elegant Raised Panel Door)

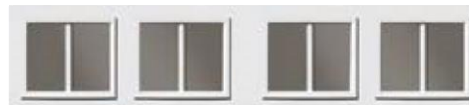

Architectural Series

(Short with Rectangular Grilles on Elegant Raised Panel Door)


WARRANTIES (SEE COMPLETE DETAILS ON PAGE RS24)



GOLD STANDARD STEEL

RESIDENTIAL GARAGE DOORS

INTELLICORE MODELS 7130-7133

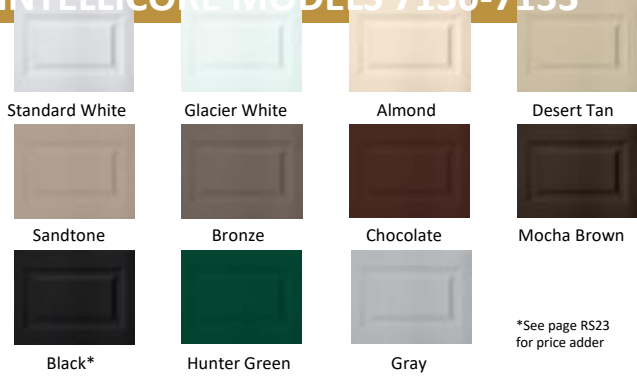

*See page RS23 for price adder

DESCRIPTION

Three-layer construction provides the quietest operation and superior durability. 1 $\frac{3}{8}$ " thick Intellicore® polyurethane insulation is bonded to 27 gauge steel for maximum strength and energy efficiency.

THREE-LAYER CONSTRUCTION



SPECIFICATIONS

- 1 $\frac{3}{8}$ " thick sections.
- Finish painted hot-dipped galvanized steel skins with unsurpassed rust protection.
- Door can be painted with high-quality latex-based paint to match house trim.
- Interior prefinished in white only.
- Prepainted end stiles.
- Nylon rollers for smooth and quiet operation.
- Optional designer window inserts are UV protected to eliminate discoloration and can be installed on the inside or outside of window frame.
- Window frame design for easy glass replacement.
- Patented Safe-T-Bracket® bottom bracket (not available on doors over 8' high).
- Insulating R-value: 12.9.*
- Doors available in widths up to 18' and heights up to 14'.

*Calculated door section R-value is in accordance with DASMA TDS-163.

PRICE INCLUDES

- Inside slide lock.
- All hardware, 12" radius track and springs.
- Extension springs with a safety containment cable are standard on all single car doors (up to 10' wide and up to 8' high).
- EZ-SET® torsion springs are standard on all double car doors (over 10' wide
- Torsion springs are standard on all extended height doors (over 8' high). Other springs are not available for extended height doors.
- Bottom weatherseal in aluminum retainer.
- Operator reinforcement bracket.

Does not include rear track hanger, low headroom kit, vinyl perimeter seals (stop molding).

Effective October 2016

GOLD STANDARD STEEL

RESIDENTIAL GARAGE DOORS

INTELLICORE® MODELS 7200-7203

R-VALUE
18.4



Model 7200 Elegant Raised Panel with Tuscany Windows



DESCRIPTION

Three-layer construction provides the quietest operation and superior durability. 2" thick Intellicores® polyurethane insulation is bonded to 27 gauge steel for maximum strength and energy efficiency.

SPECIFICATIONS

- 2" thick sections.
- Finish painted hot-dipped galvanized steel skins with unsurpassed rust protection.
- Door can be painted with high-quality latex-based paint to match house trim.
- Interior prefinished in white only.
- Prepainted end stiles.
- Nylon rollers for smooth and quiet operation.
- Optional designer window inserts are UV protected to eliminate discoloration and can be installed on the inside or outside of window frame.
- Window frame design for easy glass replacement.
- Patented Safe-T-Bracket® bottom bracket (not available on doors over 8' high).
- Insulating R-value: 18.4.*
- Doors available in widths up to 20' and heights up to 14'.

*Calculated door section R-value is in accordance with DASMA TDS-163.

PRICE INCLUDES

- Inside slide lock.
- All hardware, 12" radius track and springs.
- Extension springs with a safety containment cable are standard on all single car doors (up to 10' wide and up to 8' high).
- EZ-SET® torsion springs are standard on all double car doors (over 10' wide and up to 8' high).
- Torsion springs are standard on all extended height doors (over 8' high). Other springs are not available for extended height doors.
- Bottom weatherseal in aluminum retainer.
- Operator reinforcement bracket.

Does not include rear track hanger, low headroom kit, vinyl perimeter seals (stop molding).

PANEL OPTIONS



Elegant Raised Panel Model 7200

Elegant Long Panel Model 7203

PANEL COLORS



*See page RS23 for price adder

WINDOWS AVAILABLE

(SEE COMPLETE LIST ON PAGES RS20-RS21)

Note: Please specify section to receive window: top section or intermediate section number.




Plain

(Shown on Elegant Raised Panel Door)




Designer Inserts

(Sunset 503 Insert Shown on Elegant Raised Panel Door)



Designer Classics – Glass

(Trenton Shown on Elegant Raised Panel Door)

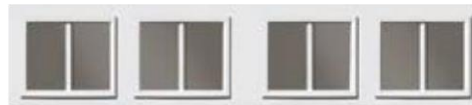

Architectural Series

(Short with Rectangular Grilles on Elegant Raised Panel Door)

WARRANTIES (SEE COMPLETE DETAILS ON PAGE RS24)



Effective October 2016

STANDARD STEEL

RESIDENTIAL GARAGE DOORS

Holmes® Limited Warranty Information

Steel Door Limited Warranty Information

We will repair or replace (at our option) any garage door section or hardware that is defective in material or workmanship pursuant to the terms of this limited warranty. This warranty extends to and benefits only the original purchaser of the garage door. This warranty does not apply to commercial, industrial or any other nonresidential installation.

We will provide, at no cost to you, sections/section components, hardware, springs/spring components or windows to repair or replace defective sections, hardware, springs/spring components or windows. All labor costs associated with the removal and reinstallation of any repaired section/section components, hardware or spring/spring components, and the installation of replacement sections/section components, hardware, spring/spring components, or windows will be your responsibility.

We reserve the right to inspect and/or verify any claimed defect. The applicable limited warranty periods are as follows:

Model Number	Paint System	Hardware
72006200, 7203, 7130, 7133, 6203, 6130, 6133	Limited Lifetime	3 years
5500, 5503, 5200, 5203	25 years	3 years
4200, 4203	15 years	3 years

72006200, 7203, 7130, 7133, 6203, 6130, 6133 Limited Lifetime 3 years

5500, 5503, 5200, 5203 25 years 3 years 4200, 4203 15 years 3 years

Terms and limitations of the limited warranty are further detailed below:

Paint System Limited Warranty

Holmes Garage Door Company warrants the sections of the Models listed above against rust through due to the paint finish cracking, checking or peeling (losing adhesion) as follows: (a) in residential single family installations for the years designated above from the date of delivery to the original purchaser; (b) in all other residential installations (including installations on facilities owned in common by condominium associations or similar organizations), for ten (10) years from date of delivery to the original purchaser, pursuant to the terms of this limited warranty.

Hardware Components Limited Warranty

We will repair or replace (at our option) any garage door hardware component that is defective in material or workmanship for the term defined in the chart above, pursuant to the terms of this limited warranty.

Decorative Windows – 10 Year Limited Warranty

Designer windows, snap-in inserts, clear acrylic windows and window frames are warranted for ten (10) years from date of purchase against manufacturing defects and excessive discoloration. This warranty does not cover any damage or loss caused by harmful chemical action, abrasive cleansers, or breakdowns due to climate extremes or environmental conditions. Insulated glass is warranted for a period of ten (10) years for material obstruction of vision resulting from film formation or dust or moisture collection between the interior surface of the insulating glass window, pursuant to the terms of this limited warranty. No warranty is available for single pane glass.

WE WILL NOT PAY FOR ANY DAMAGES, INCLUDING INCIDENTAL OR CONSEQUENTIAL DAMAGES,



STANDARD STEEL

RESIDENTIAL GARAGE DOORS

CAUSED BY OR RESULTING FROM DEFECTIVE GARAGE DOOR SECTIONS OR HARDWARE. Some states do not allow the exclusion of incidental or consequential damages, so the above limitation may not apply to you.

Our warranty shall not extend to or cover deterioration due to damage or rust to the garage door caused by fire, an act of God, other accident or casualty, vandalism, radiation, harmful fumes or foreign substances in the atmosphere, or occurring as a result of any physical damage or the failure of paint that is not applied per the manufacturer's specifications after the garage door left our factory, or failure to follow all installation and maintenance instructions. Nor shall our warranty extend to or cover any damages due to normal wear and tear, or claims with respect to any products that in any way or degree have been altered, processed, misused or improperly handled or installed.

If your garage door does not conform to this warranty, notify us in writing at the following address promptly after discovery of the defect. Clopay Building Products, Attn: Consumer Services Dept., 1400 West Market Street, Troy, Ohio 45373. Additional copies of our installation and maintenance instructions may be obtained by calling 1-800-557-0488.

WE MAKE NO OTHER WARRANTIES, REPRESENTATIONS, OR COVENANTS, EXPRESS OR IMPLIED, WITH RESPECT TO THIS PRODUCT, INCLUDING BUT NOT LIMITED TO WARRANTIES, REPRESENTATIONS OR COVENANTS AS TO WORKMANSHIP, DESIGN, CAPACITY, QUALITY, CONDITION, MERCHANTABILITY, OR FITNESS FOR ANY PURPOSE OF THE PRODUCT, EXCEPT FOR ANY "IMPLIED WARRANTY" AS THAT TERM IS DEFINED IN THE MAGNUSON-MOSS WARRANTY-FEDERAL TRADE COMMISSION IMPROVEMENT ACT, SUCH IMPLIED WARRANTIES TO BE LIMITED IN DURATION TO A PERIOD OF ONE YEAR FROM THE DATE OF PURCHASE.

This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

Holmes Garage Door Company[®] is a trademark of Clopay Building Products Company, Inc. ©2016 Clopay Building Products Company, Inc., a Griffon company.